




HL SEAL Data Sheet

Acme Reg No: 0901013

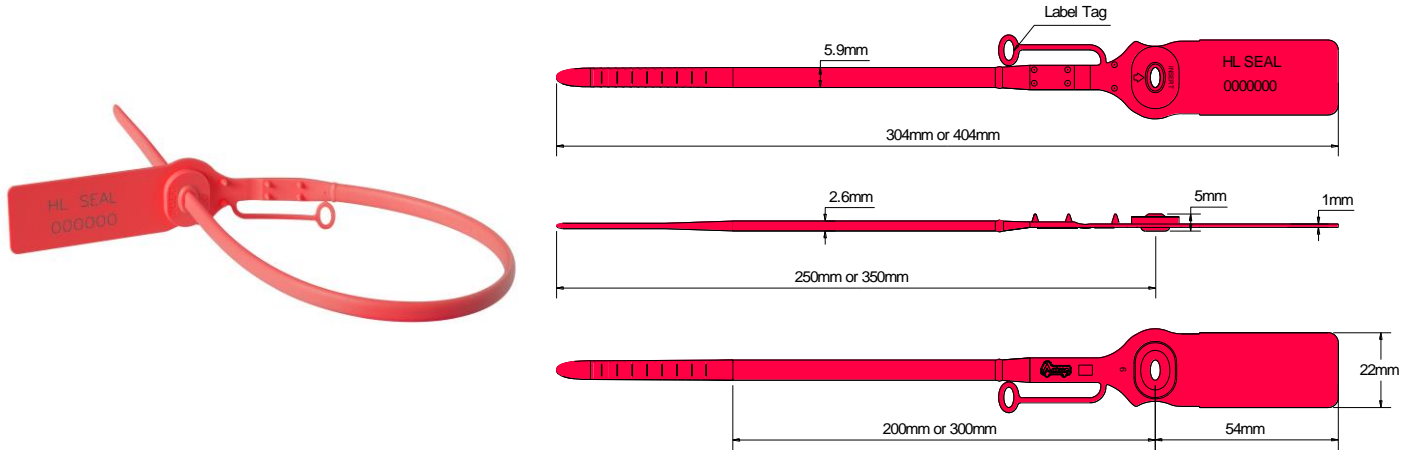

The Acme **HL Seal** is a smooth ribbon, pull-tight seal manufactured from Polypropylene material. The design profile is unique and features rolled heat staking technology to secure the metal spring insert to the body, thus providing clear evidence of tampering if forced open or cut. The seal is manufactured with gripping spikes and a label holder as standard but with an option of a tear off tag if preferred (See HL1 Seal Data Sheet). The excellent breaking strength, combined with a ribbon width of less than 6mm, makes this seal the ideal choice for many applications.

Technical Data

Recommended Applications

Airlines, Cargo, Trailers, Tankers, Rail & Sea Freight, Containers, Refineries, Warehouses, Cash bags, Postbags, Valves, Hatches, Lockers.

Material

Body - Polypropylene with Biodegradable additives
Insert - Spring Stainless Steel

Available Operating Lengths

(L1) 25cm (overall 30cm)
(L2) 35cm (overall 40cm)

Strap Width

5.9mm

Tag Marking Dimensions

22mm x 45mm

Average Application Breaking Strength

40kg

Marking

Laser or Foil marking
Consecutively numbered as standard
Optional Customer name/logo
Optional Laser Barcoding

Colours

Foil marked: red, blue, green, yellow, orange, black, white.
Laser or Foil marked: pastel shades of pink, blue, green, yellow, peach, also black and white.
Other colours may be available on request.

Packaging

Standard Packaging : 10 per mat and 1,000 seals/carton

Carton Dimensions : (L1) - 33.5cm x 24cm x 26.5cm
: (L2) - 43.5cm x 24cm x 26.5cm

Carton weight : (L1) - 4.7kg/carton
: (L2) - 6.0kg/carton

