GRIPTIGHT PP SEAL Data Sheet

Acme Reg No: 1108008

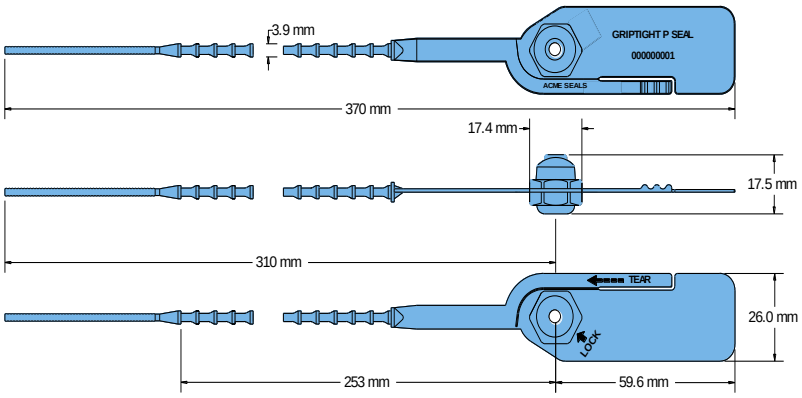

The Acme **Griptight PP Seal** is a versatile pull-tight seal manufactured from two dissimilar materials. The acetyl insert is unique in design as it incorporates two sets of locking teeth moulded in one insert, unlike similar seals requiring two separate inserts. The material will withstand freezing and boiling conditions, whilst the polypropylene body is flexible for easy use. The design includes rolled heat staking technology to secure the insert to the body, which provides clear evidence of tampering if forced open or cut. There is also a tear off tag for easy removal, making this a very user friendly seal suitable for most applications.

Technical Data

Recommended Applications
Airlines, Cargo, Trailers, Tankers, Rail Freight, Refineries, Containers, Postbags, Fire doors, Lockers.

Material
Body – Polypropylene with Biodegradable additives
Insert – Acetyl with Biodegradable additives

Available Operating Length
31cm (overall 37cm)

Tag Marking Dimensions
26mm x 59.6mm

Ribbon Diameter
3.9mm

Average Application Breaking Strength
16kg

Marking
Laser or Foil marking
Consecutively numbered as standard
Optional Customer name/logo
Optional Laser Barcoding

Colours
Foil marked: red, blue, green, yellow, orange, black, white.
Laser or foil marked: pastel shades of pink, blue, green, yellow, peach, also black and white.
Other colours may be available on request.

Packaging
Standard Packaging	: 10 per mat and 1,000 seals/carton
Carton Dimensions	: 61cm x 40cm x 23.3cm
Carton Weight	: 5.92kg/carton

Acme Seals (Malaysia) Sdn Bhd
No. 10, Jalan BP 4, Bandar Bukit Puchong,
47120 Puchong, Selangor Darul Ehsan, Malaysia.
Tel: +603 8062 8738 / Fax: +603 8060 8731

Acme Seals Limited
Unit 9, Rosewood Business Park
Eastways, Witham, Essex, CM8 3AA, United Kingdom
Tel: +44 (0) 1376 521841 / Fax: +44 (0) 1376 521617